


FORM PTO-1390 (REV 5-93)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER 1997/49442	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				U.S. APPLICATION NO. (if known, see 37 CFR 1.5) [Not yet assigned] 09/744297	
INTERNATIONAL APPLICATION NO. PCT/DE99/02212		INTERNATIONAL FILING DATE 20 July 1999		PRIORITY DATE CLAIMED 23 July 1998	
TITLE OF INVENTION METHOD AND DEVICE FOR TREATING CONTAMINATED MATERIALS					
APPLICANT(S) FOR DO/EO/US Helmut GOELDNER					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
1. <input checked="" type="checkbox"/> This is FIRST submission of items concerning a filing under 35 U.S.C. 371.					
2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371					
3. <input type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).					
4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.					
5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)					
a. <input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau					
c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)					
6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2).					
7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))					
a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).					
b. <input type="checkbox"/> have been transmitted by the International Bureau.					
c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.					
d. <input type="checkbox"/> have not been made and will not be made.					
8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3).					
9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).					
10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).					
Item 11. to 16. below concern other document(s) or information included:					
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.					
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.					
13. <input checked="" type="checkbox"/> A FIRST preliminary amendment.					
<input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.					
14. <input type="checkbox"/> A substitute specification.					
15. <input type="checkbox"/> A change of power of attorney and/or address letter.					
16. <input checked="" type="checkbox"/> Other items or information:					

Form PCT/IB/308


23911
 PATENT TRADEMARK OFFICE

U.S. APPLICATION NO. 09/744297 [Not Yet Awaiting]		INTERNATIONAL APPLICATION NO. PCT/DE99/02212		ATTORNEY'S DOCKET NUMBER 1997/49442					
17. [X] The following fees are submitted: Basic National Fee (37 CFR 1.492(a)(1)-(5): Search Report has been prepared by the EPO or JPO \$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) ... \$670.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$760.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$970.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$96.00				<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="width: 50%;">CALCULATIONS</th> <th style="width: 50%;">PTO USE ONLY</th> </tr> <tr> <td colspan="2" style="height: 100px;"></td> </tr> </table>		CALCULATIONS	PTO USE ONLY		
CALCULATIONS	PTO USE ONLY								
ENTER APPROPRIATE BASIC FEE AMOUNT =				\$ 860.00					
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$					
Claims	Number Field	Number Extra	Rate						
Total Claims	24-20=	4	X \$18.00	\$ 72.00					
Independent Claims	2-3=		X \$80.00	\$					
Multiple dependent claims(s) (if applicable)				+ \$270.00					
TOTAL OF ABOVE CALCULATIONS =				\$					
<input checked="" type="checkbox"/> Applicant Claims Small Entity Status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$ 466.00					
SUBTOTAL =				\$					
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$					
TOTAL NATIONAL FEE =				\$					
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +				\$					
TOTAL FEE ENCLOSED =				\$ 466.00					
				Amount to be: \$					
				refunded					
				charged \$					
a. [X] A check in the amount of \$ 466.00 to cover the above fees is enclosed. b. [] Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 05-1323 . A duplicate copy of this sheet is enclosed.									
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.									
SEND ALL CORRESPONDENCE TO: Evenson, McKeown, Edwards & Lenahan, P.L.L.C. 1200 G Street, N.W., Suite 700 Washington, D.C. 20005 Tel. No. (202) 628-8800 Fax No. (202) 628-8844									
				<div style="text-align: center;"> </div> SIGNATURE J. D. Evans NAME 26,269 REGISTRATION NUMBER 23 January 2001 DATE					

09/744297

J602 Rec'd PCT/PTO 23 JAN 2001

Attorney Docket No. 1997/49442

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Stage Patent Application of

Helmut GOELDNER

Serial No.: PCT/DE99/02212

Filed: July 20, 1999

For: METHOD AND DEVICE FOR TREATING CONTAMINATED MATERIALS

PRELIMINARY AMENDMENT

Box PCT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Preliminary to examination of the accompanying PCT National
Stage application, kindly amend the application as follows:

In the specification:

Page 1, between the title and the first line, please insert
the heading -- BACKGROUND OF THE INVENTION --.

Page 2 (AMENDED SHEET), between lines 12 and 13, please
insert the heading -- SUMMARY OF THE INVENTION --;

lines 17 and 18, delete "through the
characteristics of claim 1 and claim 8." and insert in lieu
thereof -- as described and claimed hereinafter. --;

line 19, delete "subclaims" and insert in lieu
thereof -- following description --.

Page 6, between lines 14 and 15, please insert the heading
-- BRIEF DESCRIPTION OF THE DRAWING --;

between lines 17 and 18, please insert the heading
-- DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS --.

In the claims:

Please cancel original claims 1 through 22, without prejudice or disclaimer, and substitute therefor the following new claims 23 through 47:

23. A method for the treatment of contaminated material comprising feeding said contaminated material via an input unit to a conveyor system extending through a treatment chamber which slants upward in the conveyor transport direction and which comprises first treatment zone adjacent the lower end of the treatment chamber and second treatment zone extending from the first treatment zone to the upper end of the treatment chamber, heating and treating the contaminated materials in said treatment chamber, and discharging the treated materials via a discharge element, wherein said contaminated material is moistened in a liquid reservoir in said first treatment zone by liquid present in the contaminated material or water added from outside the treatment chamber, the liquid in said liquid reservoir being to a temperature lower than the boiling point of water, and thereafter heating the contaminated material in said second treatment zone at least partially to a temperature above the boiling point of water in order to build up steam pressure to disinfect the contaminated material.

24. A method according to claim 23, wherein said contaminated material is contaminated with infectious microorganisms.

25. A method according to claim 23, wherein the second treatment zone is subdivided into a plurality of sections each having a different temperature.

26. A method according to claim 23, wherein the steam pressure in said second zone is generated by evaporation of the inherent moisture in the contaminated material.

27. A method according to claim 23, wherein the steam pressure in said second zone is generated by evaporation of liquid water added to the contaminated material from outside the treatment chamber.

28. A method according to claim 23, wherein the steam pressure in said second zone is generated by introducing steam into said treatment chamber.

29. A method according to claim 23, wherein the liquid level in said liquid reservoir is regulated by an overflow.

30. A method according to claim 29, wherein liquid discharged from said overflow is recycled back to the liquid reservoir.

31. A method according to claim 23, wherein the contaminated material to be treated is introduced in portions into the treatment chamber such that a plurality of portions are present in the treatment chamber at the same time, said portions being introduced into and discharged from the treatment chamber through slide valves or locks.

32. A method according to claim 23, wherein said conveyor system comprises a screw conveyor.

33. An apparatus for treating contaminated material, said apparatus comprising a treatment chamber which slants upward from a lower inlet end to an upper discharge end and which comprises first heating zone adjacent the lower end of the treatment chamber and a second heating zone extending from the first treatment zone to the upper end of the treatment chamber, an input unit and said inlet end for introducing contaminated material to be treated into the treatment chamber, a discharge element at said discharge end for discharging treated material from said treatment chamber, a conveyor system for conveying material to be treated through said treatment chamber, means for moistening contaminated material in said first heating zone, means for heating liquid in said first heating zone to a temperature below the boiling point of water, and means for heating moistened contaminated material in said second heating zone at least partially to a temperature above the boiling point of water to generate steam pressure to disinfect the contaminated material.

34. An apparatus according to claim 33, wherein the second heating zone is subdivided into a plurality of sections heated to different temperatures.

35. An apparatus according to claim 33, further comprising means for introducing steam into said second heating zone.

36. An apparatus according to claim 33, further comprising means for introducing liquid water into said first heating zone.

Serial No. PCT/DE99/02212

37. An apparatus according to claim 33, wherein said first treatment zone comprises a liquid reservoir, and further comprising an overflow for regulating the liquid level in said liquid reservoir.

38. An apparatus according to claim 37, further comprising a collection vessel which receives liquid from said overflow and a return line which connects said collection vessel to said treatment chamber for recycling liquid from said collection vessel back to said treatment chamber.

39. An apparatus according to claim 38, wherein said overflow, said collection vessel and said return line are maintained at the same pressure as said treatment chamber.

40. An apparatus according to claim 33, wherein at least one of said heating means is provided in an inner wall of said treatment chamber.

41. An apparatus according to claim 33, wherein at least one of said heating means is provided in said conveyor system.

42. An apparatus according to claim 33, comprising means for controlled introduction of microwave energy into said treatment chamber or said conveyor system.

43. An apparatus according to claim 33, wherein said conveyor system comprises a screw conveyor.

Serial No. PCT/DE99/02212

44. An apparatus according to claim 43, wherein said screw conveyor has a bearing at only one end and rests on slide runners.

45. An apparatus according to claim 33, further comprising a shredder in said input unit.

46. An apparatus according to claim 33, comprising slide valves or locks for opening and closing said input unit and said discharge element.

47. In combination, a shredder unit and a plurality of treating apparatus according to claim 33, said treating apparatus being arranged in parallel so that they can be supplied simultaneously or sequentially by the shredder unit.

In the abstract:

After the last page of the claims, please insert the Abstract of the Disclosure found on the accompanying sheet.

Serial No. PCT/DE99/02212


REMARKS

The foregoing amendments are respectfully submitted to insert recommended section headings, to delete improper references to the claims from the specification, to present claims in better form for examination by the U.S. Patent and Trademark Office, and to add the required abstract of the disclosure.

Favorable action on the application is earnestly solicited.

Respectfully submitted,

January 23, 2001


J. D. Evans,
Registration No. 26,269

EVENSON, McKEOWN, EDWARDS
& LENAHA, P.L.L.C.
1200 G Street, N.W., Suite 700
Washington, D.C. 20005
Telephone: (202) 628-8800
Facsimile: (202) 628-8844

ABSTRACT OF THE DISCLOSURE

A method and apparatus (1) for treating contaminated materials in which the materials are fed by an input unit (2, 3, 4) to a conveyor system (9) extending through a treatment chamber (6) where they are heated, treated and discharged via a discharge element (12). A liquid reservoir (16) is created in a first treatment area of the treatment chamber (6) by inclining the treatment chamber. The first area is also heated to a temperature below the boiling point of water, and a second area extending from the first treatment area to the top end of the treatment chamber (6) is at least partially heated to a temperature above the boiling point of water. This enables the contaminated material to be treated and compacted in a simpler, more reliable manner and in a (quasi-) continuous flow through several treatment areas.

METHOD AND DEVICE FOR TREATING CONTAMINATED MATERIALS

The invention concerns a method for the treatment of contaminated materials, particularly infected materials, whereby said materials are fed by means of an input unit to a conveyor system extending into a treatment chamber, where they are heated, treated, and discharged via a discharge element. Furthermore, the invention concerns a device for the above method in which essentially the entire treatment chamber is slanted upward in the direction of transport.

A high-temperature disinfection plant for hospital-specific waste is already known from DE 39 38 546 C2 in which the wastes are supplied to two screw segments separated by a mechanical pressure-sealed intermediate lock via a receiving hopper. An adjustable steam pressure is hereby generated in the first screw segment through the introduction of heat, while a partial vacuum is generated in the second screw segment in order to dehumidify the material by sucking away the steam. In this known plant, it is disadvantageous that the two screw sections are separated by a mechanical pressure lock which is expensive and, of course, also represents a potential source of defects. In addition, the screw sections are positioned in the horizontal plane in such a way that contaminated liquids can flow unnoticed through the plant and pass through the disinfection process untreated and/or insufficiently treated. It is in no way assured here that a safe disinfection and/or, in particular, sterilization of the wastes occurs.

A device for the regeneration and sterilization of soil is known from DE 92 13 599 U1. In this device, the soil is sent through a slanted treatment chamber and thereby impinged upon by steam. It is, however, disadvantageous in this device that two different treatment zones which serve for moistening and/or for disinfection or sterilization of the material to be treated are not provided. Rather, disinfection or sterilization occurs over the entire area of the treatment chamber. Furthermore, no pressure buildup can occur in the device because it is not a closed system.

A device and a method for the sterilization and disinfection of contaminated hospital waste is also already known from DE 41 38 938 A, in which the waste is first shredded and the damp granulate thus obtained is subsequently fed to a disinfection screw in a slanted treatment chamber, wherein three regions are provided for treatment. The granulate is first dried in the lower region and subsequently agitated and disinfected with flowing steam in the next section of the disinfection screw, which lies higher up, in order to finally be redried in the upper part of the disinfection screw and conveyed to a container via a conveyor device.

Furthermore, a method and a device for the decontamination of bulk material is described in DE 44 09 391 A1. However, in this prior art as well, two different treatment zones for moistening and/or for decontamination of the material are not provided. In addition, a closed system suitable for pressure buildup is not provided here, either.

It is the object of the invention to provide a method and a compact device which, using simple technical means, make possible different treatment zones for batch operation, single step and multi-step processes, and continuous operation, while always assuring a reliable disinfection and/or sterilization of contaminated materials.

This object is achieved in accordance with the invention through the characteristics of claim 1 and claim 8. The further development of the invention can be inferred from the subclaims.

In the method according to the invention, a first treatment zone for moistening of the infected materials is made by producing a liquid reservoir in a first region of the treatment chamber with the liquid present in the infected material and/or the introduction of water from the exterior by slanting essentially the entire treatment chamber upwards in the direction of transport and heating the liquid reservoir to a temperature lower than the boiling point of water, wherein the first region lies adjacent the lower end of the treatment chamber. Furthermore, a second treatment zone for disinfection and/or sterilization is made by heating a second region, extending from the first region up to the higher end of the treatment chamber,

2a

at least partially to a temperature higher than the boiling point of water and building up the steam pressure required for disinfection and/or sterilization in the second region.

In this way, it is assured that contaminated liquid always collects in a defined region of the treatment chamber and thereby cannot flow unnoticed into an undesired section of a device used. In addition, at least two treatment zones are created according to the method, namely a first one, in which the infected material is moistened within the liquid reservoir, and a second, in which the temperature and the steam pressure are provided which are necessary for disinfection or

sterilization. The method allows a continuous and/or quasi-continuous disinfection and/or sterilization process, whereby the optimization of dwell times in the various treatment zones can be assured due to shorter paths.

It can be provided that the second region of the treatment chamber is divided into sections, each with a different temperature. Thus, for example, a section which borders immediately on the first region can have a lower temperature than the following section and thereby serve as a transition section. In this transition section steam, for example, can be supplied in order to achieve the desired steam pressure in the second region, in which the second step of the disinfection and/or sterilization process occurs. Furthermore, particularly in this transition section, various measurement procedures for determination of process parameters can be performed.

In the first region, means for the supply of water in liquid form can be provided in order to keep the level of the liquid reservoir at a preset height. The maximum level of the liquid reservoir is preferably regulated via an overflow. It is hereby practical if the liquid which flows into the overflow can be fed back into the liquid reservoir so that it can also be disinfected or sterilized at a later time in a separate process.

It can be provided that the material to be treated is supplied in small portions, whereby the supply and the removal occurs via slide valves and/or pressure locks of the input unit and the discharge element. The portions are hereby each at different treatment steps. By means of the locks it can be assured that no noticeable loss of pressure occurs during the feeding and/or the removal of batches, and the technical process parameters therefore do not change. A slight transient pressure variation can, however, also be intentional, in order to positively influence the effectiveness of the disinfection and/or sterilization process by such "breathing".

The conveyor system used in the method preferably has a screw conveyor.

In the method, the saturated steam desired in the second region of the treatment chamber can be produced merely by moving the material to be treated out of the liquid reservoir and, thus moistened, into the second region of the treatment chamber, where the water on the surface of the waste steams. As a rule, this inherent moisture of the material to be treated is sufficient to produce the steam pressure required. If, however, the steam pressure thus obtained is not sufficient, additional steam can be supplied.

The device according to the invention is characterized in that the treatment chamber has a first heating zone which lies adjacent the lower end of the treatment chamber and is designed to generate a temperature below the boiling point of water and, furthermore, has a second heating zone which extends between the first heating zone and the higher end of the treatment chamber and is designed to generate a temperature above the boiling point of water and to build up the steam pressure required for disinfection and/or sterilization.

Slanting the treatment chamber ensures that the liquid which is in the contaminated materials supplied to the treatment chamber and is, for example, released by the action of an upstream shredder collects in the first heating zone. This assures on one hand that contaminated liquid does not reach undesired regions of the treatment chamber. On the other hand, a liquid reservoir is produced through the collection of the contaminated liquid and, if necessary, through the external addition of water which can be used for moistening of the materials to be treated. The first heating zone is designed so that the liquid reservoir can be heated to a temperature which is slightly below the boiling point of water, i.e., under 100 °C at atmospheric pressure. Therefore, because the temperature is below the prevailing boiling point, a high evaporation rate of the water and undesired encrustations on the inner walls of the treatment chamber or on the conveyor system are prevented. In addition, because the boiling point is not attained, the release of vapors and possible odors when the input unit is opened is prevented. The device according to the invention makes the production of several temperature and/or treatment zones possible while requiring little space. Due to the technical means, a reliable hermetic shield, and thus reliably reproducible process control, is assured in which a very economical disinfection and/or sterilization can be performed.

The first heating zone can, for example, have means for the supply of liquid water so that the level of the liquid in the liquid reservoir can be regulated. The second step of the disinfection and/or sterilization method occurs in the second heating zone. The second heating zone can have means for the introduction of water in the form of liquid and of steam so that saturated steam can also be generated in case the inherent moisture of the material to be treated is not sufficient. In addition, means for the attachment of gauges of varying types, particularly temperature, dampness, and pressure gauges, as well as means for the supply of aggregates, can be provided in the second heating zone. In the framework of the invention it can be provided that the second heating zone is subdivided into further heating sections for the generation of further temperatures. Thus, for example, a section of the second heating zone bordering immediately on the first heating zone can represent a temperature transition from the first heating zone to a section of the second heating zone in which the temperature necessary for disinfection and/or sterilization is present.

Furthermore, it can be provided that the treatment chamber has an overflow for regulation of the liquid reservoir. This overflow preferably discharges into a pressure sealed collection vessel which is in turn connected with the treatment chamber through a return line. The overflow, the collection vessel, and the return line are preferably designed in such a way that they have the same pressure as in the treatment chamber. It is thus possible to pump liquid from the collection vessel into the treatment chamber through a simple pumping system if the liquid level in the treatment chamber is to be raised. An additional high-temperature disinfection and/or high-temperature sterilization unit can also be provided in which the liquid from the collection vessel can be treated. The collection vessel itself can hereby also be designed as an autoclave.

An array of heating means can be used to generate the respective temperatures in the different heating zones and/or heating sections. Thus, for example, the inner wall of the treatment chamber can be provided with heating means. This could consist of a double shell provided with heat transfer oil. The heat transfer oil is hereby heated by a heating block.

It can also be provided that microwave energy can be definably conducted into damp material in the treatment chamber and/or in the conveyor system in order to heat the material to the desired temperature.

The conveyor system preferably has a screw conveyor. This can be designed to be reversible in order, if necessary, to reduce pressure if a transport bottleneck occurs. It is advantageous if the screw conveyor only has a bearing on one end and rests on slide runners.

It is very practical if a shredder is positioned in the input unit, which is particularly advantageous for the shredding of contaminated hospital wastes.

To increase capacity, a plant can be provided which has several of the devices described above and one shredder unit, whereby the devices are laid out in parallel in such a way that they can be simultaneously and/or sequentially charged by the shredder unit. In this way, even if the individual devices are used in so-called batch operation, a quasi-continuous disinfection and/or sterilization can be performed.

In the following, the device according to the invention will be described in more detail with the aid of an exemplary embodiment, whereby reference will be made to the single figure. The figure schematically shows a device according to the invention.

In the figure, a device for the treatment of contaminated materials, particularly infected materials, is indicated with 1. The device 1 has a feed hopper 2, under which a shredder 3 is positioned, as a component of an input unit. From the shredder 3, a gravity feed hopper 4 leads to an intake 5 of a tube-shaped treatment chamber 6. The intake 5 can be closed by a slide valve 7. In place of the slide valve 7, or in addition to same, a lock could also be provided. A metering device 8 is positioned above the intake 5.

A screw conveyor 9 having a conveyor spiral 10 extends into the treatment chamber 6. The screw conveyor 9 is driven by a drive 11. The treatment chamber 6 is slanted upwards in the transport direction of the screw conveyor 9, with, for example, an angle to the horizontal of approximately 10° to 40°. At the upper end of the treatment chamber 6 there is a discharge element 12 with a

discharge chute 13. The discharge element 12 is also provided with a slide valve 14. A lock could, of course, also be provided here instead of the slide valve 14 or in addition to same.

An overflow 15 for liquid 16, which can collect in a lower region of the treatment chamber 6, is positioned on the lower side of the treatment chamber 6. The overflow 15 is connected via a conduit 17 with a collection vessel 18. The collection vessel 18 is connected via a further conduit 19 with the treatment chamber, whereby the conduit 19 discharges above the maximum level of the liquid 16 in the lower end of the treatment chamber 6.

The device 1 has two heating zones in which different temperatures can be generated. The first heating zone extends from the lower end of the treatment chamber 6 to the overflow 15. The second heating zone is immediately adjacent to the first heating zone and extends up to the upper end of the treatment chamber 6. In order to simplify the figure, the heating means of the two heating zones are not shown. They could, for example, be comprised of a double casing of the treatment chamber 6 filled with heat transfer oil, wherein the double casing has two chambers, corresponding to the two heating zones. The heat transfer oil is hereby, for example, heated by two separate heating blocks. It is also possible to use heat exchangers.

There is a ventilation valve 21 at the upper end of the treatment chamber 6 connected via a conduit 22 with the gravity feed hopper 4. Furthermore, inlet means 23 for the introduction of steam are provided in the second heating zone.

The metering device 6 is positioned over the intake 5, which is formed as a slot in a base plate and can be closed by the slide valve 7.

In order to treat contaminated materials, the material to be treated is supplied to the device 1 via the feed hopper 2. The shredder 3 shreds the material to a size of, for example, approximately 10 x 20 mm in cross-section, whereby in hospital wastes hollow bodies, such as syringes, are destroyed. The material is then supplied via the gravity feed hopper 4 to the metering device 8. The metering device 8 assures that the material reaches the intake 5 after shredding, without the occurrence of bridging

within the intake 5. The truncated cone shape of the gravity feed hopper 4 also helps to prevent bridging.

The material to be treated reaches the liquid reservoir 16 in the treatment chamber 6. The liquid portion of the material to be treated released by the shredder 3 contributes to the liquid reservoir 16, whose liquid level is measured by a liquid sensor (not shown) and can, if necessary, be raised to the desired value by the supply of liquid from the collection vessel 18 or by the addition of liquid water. The liquid reservoir 16 has a temperature which is slightly lower than the prevailing boiling point of water. In this way, encrustations on the inner walls of the treatment chamber 6 or on the screw conveyor 9 are prevented. The material to be treated is soaked in the liquid reservoir 16. The material is subsequently transported into the second heating zone via the screw conveyor 9. This heating zone essentially, i.e., in a transition section of the second heating zone extending from the overflow 15 up to approximately the height of the treatment chamber 6 indicated by the arrow 20, has a temperature above the boiling point, so that the water of the moistened material steams and a corresponding steam pressure builds up. The process conditions are adjusted so that the material is heated for disinfection to a temperature of more than, for example, 100°C and for sterilization to a temperature of at least 121°C. For this purpose, saturated steam is generated which, if the inherent moisture of the material is not sufficient, can also be generated by supplying steam via the intake means 23 of the treatment chamber 6. The actual disinfection and/or sterilization process, which can last, for example, for a period of at least 15 minutes, occurs in the second heating zone. After the treatment process is finished, the ventilation valve 21 is first opened in order to let off the steam pressure. The steam is hereby fed to the gravity feed hopper 4, in which further material to be treated is already present which will be preheated by the steam. Further dehumidification of the treated material simultaneously occurs in that water which is on the surface of the material or which clings to the material due to capillary action steams due to the reduction in pressure while utilizing the tangible heat of the material, while the temperature of the water and material approaches the boiling point at normal pressure. The discharge element 12 is subsequently opened by the slide valve 14 in order to remove the treated material. The intake 5 is preferably simultaneously opened in order to introduce further material to be treated into the treatment chamber 6 in proportion to the amount of material discharged.

With the device according to the invention, contaminated materials, which are preferably hospital-specific wastes, but could, for example, also be sewage sludge, contaminated soils, or foods, such as grains and spices, can be reliably disinfected and/or sterilized. The compact design of the device makes possible a cost-effective and reliable treatment of the materials and, in addition, the production of compact, efficient mobile plants.

[illegible]

Patent claims

1. Method for the treatment of contaminated materials, particularly infected materials, in which said materials are fed by means of an input unit (2, 3, 4) to a conveyor system (9) extending into a treatment chamber (6) where they are heated, treated, and discharged via a discharge element (12), characterized in that, a first treatment zone for moistening the infected material is made in which a liquid reservoir (16) is produced in a first region of the treatment chamber (6) with the liquid present in the infected material and/or the external addition of water by slanting essentially the entire treatment chamber (6) upwards in the direction of transport and the liquid reservoir is heated to a temperature lower than the boiling point of water, whereby the first region lies adjacent the lower end of the treatment chamber,

and a second treatment zone for disinfection and/or sterilization is made by heating a second region which extends from the first region to the higher end of the treatment chamber (6) at least partially to a temperature above the boiling point of water and by building up the steam pressure necessary for disinfection and/or sterilization in the second region.
2. Method according to claim 1, characterized in that the second region is subdivided into sections with varying temperatures.
3. Method according to claim 2, characterized in that in the second region, the desired steam pressure is generated by the evaporation of the inherent moisture of the material to be treated and/or by the supply of water in liquid form and/or steam.
4. Method according to one of the preceding claims, characterized in that the level of the liquid reservoir (16) is regulated by an overflow (15).
5. Method according to claim 4, characterized in that liquid from the overflow (15) is fed back into the liquid reservoir (16).

6. Method according to one of the preceding claims, characterized in that the material to be treated is supplied in portions which are in the treatment chamber (6) at the same time, whereby supply and removal occurs via slide valves or locks of the input unit (2, 3, 4) and the discharge element (12).
7. Method according to one of the preceding claims, characterized in that the conveyor system has a screw conveyor (9).
8. Device for the treatment of contaminated materials, particularly infected materials, in which said materials are fed by means of an input unit (2, 3, 4) to a conveyor system (9) extending into a treatment chamber (6) where they are heated, treated, and discharged via an discharge element (12), wherein essentially the entire treatment chamber (6) is slanted upward in the direction of transport, and the treatment chamber (6) has a first heating zone which lies adjacent the lower end of the treatment chamber and a second heating zone which extends between the first heating zone and the higher end of the treatment chamber (6) and which is designed to generate a temperature for building up the steam pressure required for disinfection and/or sterilization, characterized in that the first heating zone is equipped with means (23, fluid reservoir 16) for moistening the introduced material with fluid and is designed to generate a temperature below the boiling point of water, and the second heating zone is designed to generate a temperature above the boiling point of water.
9. Device according to claim 8, characterized in that the second heating zone is subdivided into further heating sections for generation of further temperatures.
10. Device according to claim 8 or 9, characterized in that the second heating zone has means (23) for the introduction of steam.
11. Device according to claims 8 to 10, characterized in that the first heating zone has means (23) for the addition of liquid water.

11a

12. Device according to one of the claims 8 to 11, characterized in that the treatment chamber (6) has an overflow (15) for regulation of a liquid reservoir (16).

11a
11b
11c
11d
11e
11f
11g
11h
11i
11j
11k
11l
11m
11n
11o
11p
11q
11r
11s
11t
11u
11v
11w
11x
11y
11z
11aa
11ab
11ac
11ad
11ae
11af
11ag
11ah
11ai
11aj
11ak
11al
11am
11an
11ao
11ap
11aq
11ar
11as
11at
11au
11av
11aw
11ax
11ay
11az
11ba
11bb
11bc
11bd
11be
11bf
11bg
11bh
11bi
11bj
11bk
11bl
11bm
11bn
11bo
11bp
11bq
11br
11bs
11bt
11bu
11bv
11bw
11bx
11by
11bz
11ca
11cb
11cc
11cd
11ce
11cf
11cg
11ch
11ci
11cj
11ck
11cl
11cm
11cn
11co
11cp
11cq
11cr
11cs
11ct
11cu
11cv
11cw
11cx
11cy
11cz
11da
11db
11dc
11dd
11de
11df
11dg
11dh
11di
11dj
11dk
11dl
11dm
11dn
11do
11dp
11dq
11dr
11ds
11dt
11du
11dv
11dw
11dx
11dy
11dz
11ea
11eb
11ec
11ed
11ee
11ef
11eg
11eh
11ei
11ej
11ek
11el
11em
11en
11eo
11ep
11eq
11er
11es
11et
11eu
11ev
11ew
11ex
11ey
11ez
11fa
11fb
11fc
11fd
11fe
11ff
11fg
11fh
11fi
11fj
11fk
11fl
11fm
11fn
11fo
11fp
11fq
11fr
11fs
11ft
11fu
11fv
11fw
11fx
11fy
11fz
11ga
11gb
11gc
11gd
11ge
11gf
11gg
11gh
11gi
11gj
11gk
11gl
11gm
11gn
11go
11gp
11gq
11gr
11gs
11gt
11gu
11gv
11gw
11gx
11gy
11gz
11ha
11hb
11hc
11hd
11he
11hf
11hg
11hh
11hi
11hj
11hk
11hl
11hm
11hn
11ho
11hp
11hq
11hr
11hs
11ht
11hu
11hv
11hw
11hx
11hy
11hz
11ia
11ib
11ic
11id
11ie
11if
11ig
11ih
11ii
11ij
11ik
11il
11im
11in
11io
11ip
11iq
11ir
11is
11it
11iu
11iv
11iw
11ix
11iy
11iz
11ja
11jb
11jc
11jd
11je
11jf
11jg
11jh
11ji
11jj
11jk
11jl
11jm
11jn
11jo
11jp
11jq
11jr
11js
11jt
11ju
11jv
11jw
11jx
11jy
11jz
11ka
11kb
11kc
11kd
11ke
11kf
11kg
11kh
11ki
11kj
11kk
11kl
11km
11kn
11ko
11kp
11kq
11kr
11ks
11kt
11ku
11kv
11kw
11kx
11ky
11kz
11la
11lb
11lc
11ld
11le
11lf
11lg
11lh
11li
11lj
11lk
11ll
11lm
11ln
11lo
11lp
11lq
11lr
11ls
11lt
11lu
11lv
11lw
11lx
11ly
11lz
11ma
11mb
11mc
11md
11me
11mf
11mg
11mh
11mi
11mj
11mk
11ml
11mm
11mn
11mo
11mp
11mq
11mr
11ms
11mt
11mu
11mv
11mw
11mx
11my
11mz
11na
11nb
11nc
11nd
11ne
11nf
11ng
11nh
11ni
11nj
11nk
11nl
11nm
11nn
11no
11np
11nq
11nr
11ns
11nt
11nu
11nv
11nw
11nx
11ny
11nz
11oa
11ob
11oc
11od
11oe
11of
11og
11oh
11oi
11oj
11ok
11ol
11om
11on
11oo
11op
11oq
11or
11os
11ot
11ou
11ov
11ow
11ox
11oy
11oz
11pa
11pb
11pc
11pd
11pe
11pf
11pg
11ph
11pi
11pj
11pk
11pl
11pm
11pn
11po
11pp
11pq
11pr
11ps
11pt
11pu
11pv
11pw
11px
11py
11pz
11qa
11qb
11qc
11qd
11qe
11qf
11qg
11qh
11qi
11qj
11qk
11ql
11qm
11qn
11qo
11qp
11qq
11qr
11qs
11qt
11qu
11qv
11qw
11qx
11qy
11qz
11ra
11rb
11rc
11rd
11re
11rf
11rg
11rh
11ri
11rj
11rk
11rl
11rm
11rn
11ro
11rp
11rq
11rr
11rs
11rt
11ru
11rv
11rw
11rx
11ry
11rz
11sa
11sb
11sc
11sd
11se
11sf
11sg
11sh
11si
11sj
11sk
11sl
11sm
11sn
11so
11sp
11sq
11sr
11ss
11st
11su
11sv
11sw
11sx
11sy
11sz
11ta
11tb
11tc
11td
11te
11tf
11tg
11th
11ti
11tj
11tk
11tl
11tm
11tn
11to
11tp
11tq
11tr
11ts
11tt
11tu
11tv
11tw
11tx
11ty
11tz
11ua
11ub
11uc
11ud
11ue
11uf
11ug
11uh
11ui
11uj
11uk
11ul
11um
11un
11uo
11up
11uq
11ur
11us
11ut
11uu
11uv
11uw
11ux
11uy
11uz
11va
11vb
11vc
11vd
11ve
11vf
11vg
11vh
11vi
11vj
11vk
11vl
11vm
11vn
11vo
11vp
11vq
11vr
11vs
11vt
11vu
11vv
11vw
11vx
11vy
11vz
11wa
11wb
11wc
11wd
11we
11wf
11wg
11wh
11wi
11wj
11wk
11wl
11wm
11wn
11wo
11wp
11wq
11wr
11ws
11wt
11wu
11wv
11ww
11wx
11wy
11wz
11xa
11xb
11xc
11xd
11xe
11xf
11xg
11xh
11xi
11xj
11xk
11xl
11xm
11xn
11xo
11xp
11xq
11xr
11xs
11xt
11xu
11xv
11xw
11xx
11xy
11xz
11ya
11yb
11yc
11yd
11ye
11yf
11yg
11yh
11yi
11yj
11yk
11yl
11ym
11yn
11yo
11yp
11yq
11yr
11ys
11yt
11yu
11yv
11yw
11yx
11yy
11yz
11za
11zb
11zc
11zd
11ze
11zf
11zg
11zh
11zi
11zj
11zk
11zl
11zm
11zn
11zo
11zp
11zq
11zr
11zs
11zt
11zu
11zv
11zw
11zx
11zy
11zz

13. Device according to claim 12, characterized in that the overflow (15) discharges into a collection vessel (18) which is connected via a return line (19) with the treatment chamber (6).
14. Device according to claim 13, characterized in that the overflow (15), collection vessel (18), and return line (19) are designed so that they are at same pressure as the treatment chamber (6).
15. Device according to one of the claims 8 to 14, characterized in that the inner wall of the treatment chamber (6) is provided with heating means.
16. Device according to one of the claims 8 to 15, characterized in that the conveyor system (9) is provided with heating means.
17. Device according to one of the claims 8 to 16, characterized in that microwave energy can be definably conducted into the treatment chamber (6) and/or the conveyor system (9).
18. Device according to one of the claims 8 to 17, characterized in that the conveyor system has a screw conveyor (9).
19. Device according to claim 18, characterized in that the screw conveyor (9) only has a bearing on one end and rests on slide runners.
20. Device according to one of the claims 8 to 19, characterized in that a shredder (3) is located in the input unit.
21. Device according to one of the claims 8 to 20, characterized in that the input unit (2, 3, 4) and the discharge element (12) can be closed off by means of slide valves (7, 14) and/or locks.
22. An installation having several devices according to one of the claims 8 to 21 and a shredder unit, whereby the devices are positioned in parallel so that they can be supplied simultaneously and/or sequentially by the shredder unit.

Fig. 1

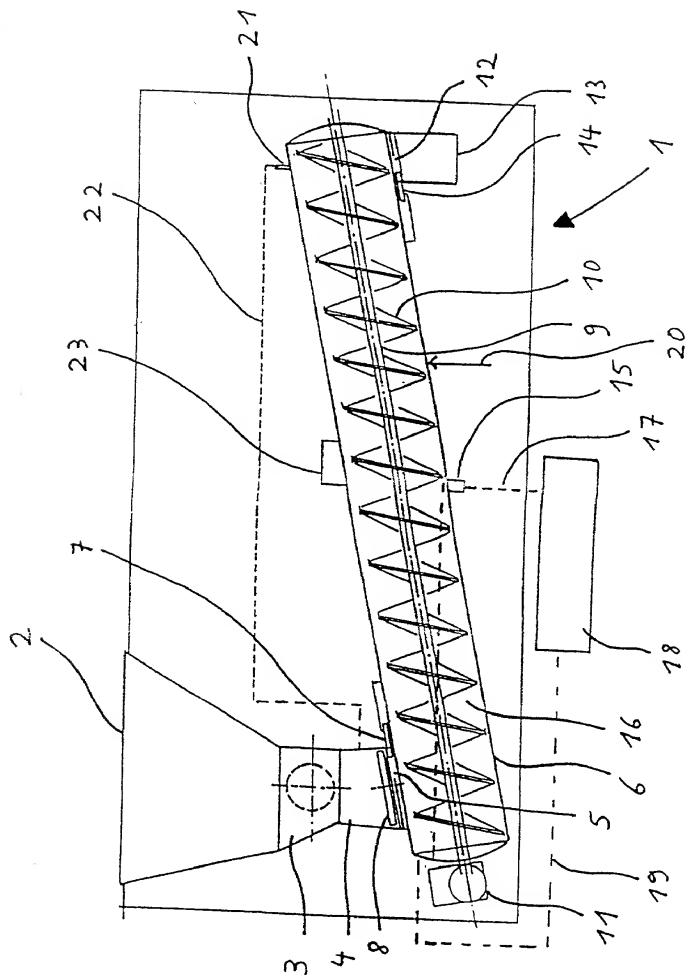


Fig. 3



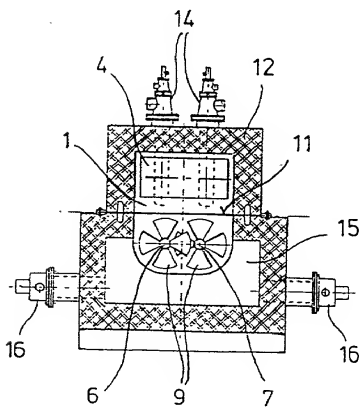


Fig. 5

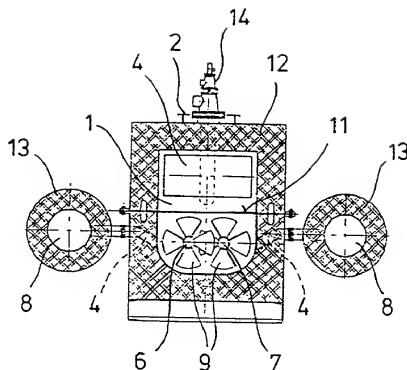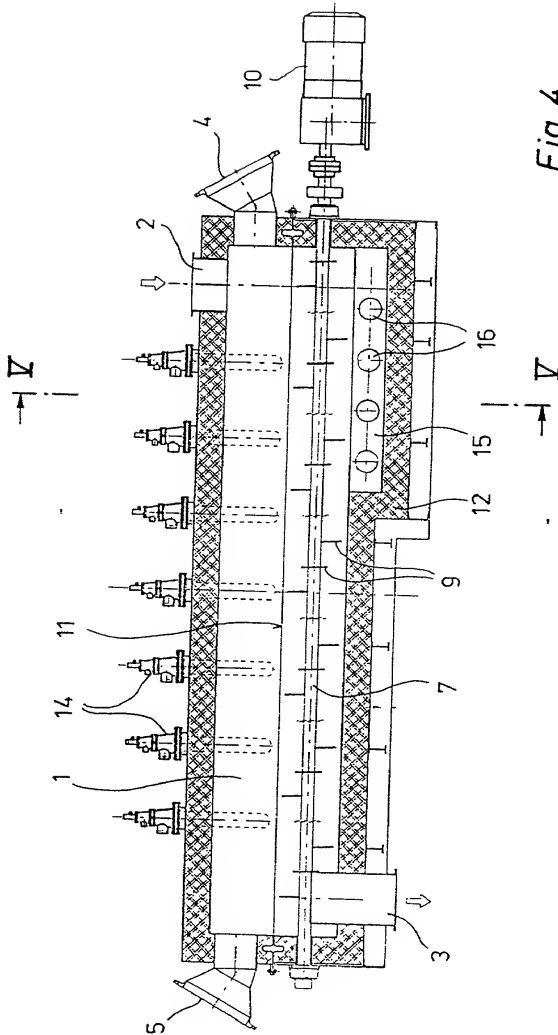

DECLARATION AND POWER OF ATTORNEY - PATENT APPLICATION

As a below named inventor, I hereby declare that my citizenship, postal address and residence are as stated below; that I verily believe I am the original, first and sole inventor (if only one inventor is named below) or a joint inventor (if plural inventors are named below) of the invention entitled:

METHOD AND DEVICE FOR TREATING CONTAMINATED MATERIALS

the specification of which

 is attached hereto, or

X was filed on 20 July 1999 as Application Serial No. PCT/DE99/02212 and was amended on 15 August 2000 (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose all information known to be material to patentability as defined in 37 CFR §1.56. I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)	Priority Claimed
<u>98 33 024.3</u> <u>Fed. Rep. of Germany</u> <u>23 July 1998</u> <u>yes</u>	
(Number)	(Country) (Day/Month/Year)
<u> </u>	<u> </u>
(Number)	(Country) (Day/Month/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose all information known to be material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
<u> </u>	<u> </u>	<u> </u>

I hereby appoint as principal attorneys James F. McKeown, Reg. No. 25,406; Donald D. Evenson, Reg. No. 26,160; Gary R. Edwards, Reg. No. 31,824; Joseph D. Evans, Reg. No. 26,269; Herbert I. Cantor, Reg. No. 24,392; and Jeffrey D. Sanok, Reg. No. 32,169 to prosecute and transact all business in the Patent and Trademark Office connected with this application and any related United States and international applications. Please direct all communications to:

Evenson, McKeown, Edwards & Lenahan P.L.L.C.
1200 G Street, N.W., Suite 700
Washington, D.C. 20005
Telephone: (202) 628-8800
Facsimile: (202) 628-8844

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application for any patent issuing thereon.

INVENTOR: Helmut GOELDNER

Citizenship: Fed. Rep. of Germany

Postal Address/Residence: Gewerbegebiet Oehmer Feld, D-31633 Leese, Germany

14.12.2000
Date

[Signature]
Signature

DEX